

Product Information Frontage blind VB 200

Heat protection due to reflection of the heat radiation in front of the facade

Design element for facades with attractive design

Up-to-date colours and numerous designs

Variable installation elements, suitable for numerous facade settings

Easy operation



Models



VB 201 - bar guided



VB 202 - barguided + tilt-out unit



VB 203 - cable guide



VB 204 - rod guide



VB 205 - drop-arm awning



VB 206 - non-split fabric anti-glare blind, bar guided


Limit sizes

Type of operation	Covering	max. surface (m ²)	min. width (mm)	max. width (mm)	min. height (mm)	max. height (mm)		
						KG 100	KG 115	
VB 201	Crank handle drive	Soltis 92/86	9	400	3500	500	4000	4500
	Crank handle drive	Sonstige *)	9	400	3500	500	2500	3000
	Crank handle drive	Acrylstoff, Allwetter, Liberty, Sunsilik	5,7	400	1260	500	4000	4500
	Standard-electric drive	Soltis 92/86	9	600	3500	500	4000	4500
	Standard-electric drive	Sonstige *)	9	600	3500	500	2500	3000
	Standard-electric drive	Acrylstoff, Allwetter, Liberty, Sunsilik	5,7	600	1260	500	4000	4500
VB 202	Crank handle drive	Soltis 92/86	9	400	3000	1200	4000	4500
	Crank handle drive	Sonstige *)	9	400	3000	1200	2500	3000
	Crank handle drive	Acrylstoff, Allwetter, Liberty, Sunsilik	5,8	400	1290	1200	4000	4500
	Standard-electric drive	Soltis 92/86	9	600	3000	1200	4000	4500
	Standard-electric drive	Sonstige *)	9	600	3000	1200	2500	3000
	Standard-electric drive	Acrylstoff, Allwetter, Liberty, Sunsilik	5,8	600	1290	1200	4000	4500

Type of operation	Covering	max. surface (m ²)	min. width (mm)	max. width (mm)	min. height (mm)	max. height (mm)	
VB 203 VB 204	Crank handle drive	Soltis 92/86	9	400	3000	500	3000
	Crank handle drive	Sonstige *)	7,5	400	3000	500	2500
	Crank handle drive	Acrylstoff, Allwetter, Liberty, Sunsilik	3,7	400	1230	500	3000
VB 203 VB 204	Standard-electric drive	Soltis 92/86	9	600	3000	500	3000
	Standard-electric drive	Sonstige *)	7,5	600	3000	500	2500
	Standard-electric drive	Acrylstoff, Allwetter, Liberty, Sunsilik	3,7	600	1230	500	3000
VB 206	Crank handle drive	Soltis 92/86	6	400	2500	500	2500
	Standard-electric drive	Soltis 92/86	6	600	2500	500	2500

Type of operation	Covering	min. width (mm)	max. width (mm)	projection (mm)	
VB 205	Crank handle drive	All	400	3000	600, 900, 1200
	Standard-electric drive	All	600	3000	600, 900, 1200

Box designs




VB 201, VB 202

Types of box:

E100 - extruded in 3 parts

E115 - extruded in 3 parts




VB 203, VB 204, VB 205

Type of box:

E100 - extruded in 2 parts with hook-in box cover

E115 - extruded in 3 parts with canted right roller cover

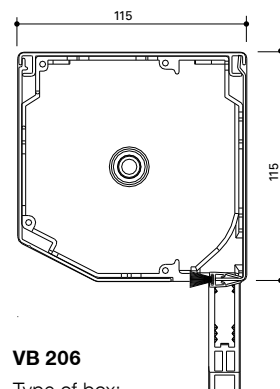

VB 206

Type of box:

E115 - extruded in 3 parts with canted right roller cover

*) Acrylstoffe, Allwetter, Liberty, Sunsilik, Glastex, Sunless, Twilight and Transsolair

KG ...Size of box

Qualified company:

Head Office:
HELLA Sonnen- und Wetterschutztechnik GmbH
 A-9913 Abfaltersbach 125
 T. +43 (0)4846 / 65 55-0
 F. +43 (0)4846 / 65 55-134
 E: office@hella.info

www.hella.info